



Steel & Scaffolds

**Al Naseeha**

Building Materials Trdg. Co.L.L.C.

Website : [www.alnaseeha.com](http://www.alnaseeha.com)

P.B. No.: 120447, Dubai - UAE,  
Tel.: +971-4-5892555 , Fax: +971-4-5892555  
E-mail : [sales@alnaseeha.ae](mailto:sales@alnaseeha.ae) , [alnaseeha@eim.ae](mailto:alnaseeha@eim.ae)  
Mob: +971 50 653 6760

**SCAFFOLDING PROFESSIONALS**

## **AL NASEEHA BLDG. MAT. TRD. CO. LL C**

Al Naseeha Bldg Mat.Trdg.Co LLC is Dubai UAE based company dealing with the complete range of Scaffolding Access System, Scaffolding Accessories, Aluminum Scaffolding and Aluminum Ladders, Scaffolder Tools & Scaffolding safety products.

We have emerged into the ever-growing market of UAE with our quality product range. We are the distributor for TIGER BRAND Scaffolder Tools, Scaffolding Safety Products which has a high demand in UAE as well as GCC MARKET

Established in 2005, as service oriented and professionally managed company specialized in scaffolding entered in UAE market with a quality workforce with excellent product knowledge. Our products are manufactured in compliance with strict quality controls and standards. In accordance with our company policies and strictly regulated BS/EN STANDARDS. We never compromise on product quality and safety and have set the benchmark for quality in each and every product we offer.

We have a dedicated team of ENGINEERING, DESIGNING & BUSINESS PROFESSIONALS who have succeeded in achieving our mission to provide good uncompromising products at a reasonable cost.

Over these years we built up a strong clientele who rely on us for our SERVICE, SAFETY & QUALITY products.

## CONTENTS

1	TUBE & COUPLERS	Page 3
2	SCAFFOLD BEAMS	Page 3
3	CUPLOCK SYSTEMS	Page 4
4	LAYHER-RINGLOCK SYSTEMS	Page 4
5	LIGHT WEIGHT H FRAMES	Page 4
6	ALUMINUM & STEEL MOBILE TOWERS	Page 5
7	ACCESSORIES	Page 5
8	FORMWORK ACCESSORIES	Page 6
9	SCAFFOLD BOARDS	Page 6
10	SCAFFOLD TOOLS & ANCILLARY	Page 7
11	SCAFFOLD CASTOR WHEELS	Page 8
12	LADDERS & ACCESSORIES / LOWER HIEGHT ACCESS	Page 8
13	SCAFFOLD MANUFACTURES ACCESSORIES	Page 9
14	PROPS & PUSH/PULL PROPS	Page 9
15	STAIRCASE SYSTEM	Page 9
16	LAYHER EVENT SYSTEMS	Page 10

# 1 TUBE & COUPLERS

## Drop Forged Swivel Coupler

Applicable on tube size: 48mm Dia  
 Component Weight : 1050 grams  
 Material of bolt: Mild Steel  
 Thread of bolt: 1/2"BSW  
 Size of nut : 20.5 mm  
 Hex Nut (Across Flat)  
 Surface Finish : Cold Zinc Plated  
 Application : used to connect two Scaffold tubes at any angle



## Joint Pin Coupler (Sheet Metal)

Applicable on tube size: 48mm Dia  
 Component Weight : 900 grams  
 Material of bolt: Mild Steel  
 Thread of bolt: 1/2" BSW  
 Size of nut: 20.5 mm  
 Hex Nut (Across Flat)  
 Surface Finish: Cold Zinc Plated (Golden Colour)



## Putlog Coupler (With Forged Cap)

Applicable on tube size: 48mm Dia  
 Component Weight : 700 grams  
 Material of bolt: Mild Steel  
 Thread of bolt: 1/2"BSW  
 Size of nut: 20.5 mm  
 Hex Nut (Across Flat)  
 Surface Finish: Cold Zinc Plated  
 Application: Used to connect two Scaffold tubes at 90°



## Single Coupler Forged

Applicable on tube size: 48mm Dia  
 Component Weight : 550 grams  
 Material of bolt: Mild Steel  
 Thread of bolt: 1/2" BSW  
 Size of nut: 20.5 mm  
 Hex Nut (Across Flat)  
 Surface Finish: Cold Zinc Plated  
 Application: Used to connect Diagonal Brace on the Scaffold Structure



## Board Retaining Coupler (With Forged Cap)

Applicable on tube size: 48mm Dia  
 Component Weight : 600 grams  
 Material of bolt: Mild Steel  
 Thread of bolt: 1/2" BSW  
 Size of nut: 20.5 mm  
 Hex Nut (Across Flat)  
 Surface Finish: Cold Zinc Plated  
 Application: Used to connect two Scaffold Boards with the Tubes



## Pressed Sheet Metal Double Coupler

Applicable on tube size: 48mm Dia  
 Component Weight : 760 grams  
 Material of bolt: Mild Steel  
 Thread of bolt: 1/2" BSW  
 Size of nut: 20.5 mm  
 Hex Nut (Across Flat)  
 Surface Finish: Cold Zinc Plated (Golden Colour)  
 Application: Used to connect two Scaffold tubes at 90°




## Pressed Sheet Metal Swivel Coupler

Applicable on tube size: 48mm Dia  
 Component Weight : 860 grams  
 Material of bolt: Mild Steel  
 Thread of bolt: 1/2"BSW  
 Surface Finish : Cold Zinc Plated  
 Application : used to connect two Scaffold tubes on beam



## Pressed Sheet Metal Steeve Coupler

Applicable on tube size: 48mm Dia  
 Component Weight : 1150 grams  
 Material of bolt: Mild Steel  
 Thread of bolt: 1/2"BSW  
 Size of nut: 20.5 mm  
 Hex Nut (Across Flat)  
 Surface Finish: Cold Zinc Plated (Golden Colour)  
 Application: Used to extend Scaffold Tubes internally



## Swivel Girder Clamp

Applicable on tube size 48 mm Dia  
 Material of bolt : Mild Steel  
 Thread of bolt : 1/2" BSW  
 Surface Finish: Cold Zinc Plated



## Drop Forged Double Coupler (Right Angle Coupler)

Applicable on tube size: 48mm Dia  
 Component Weight : 1025 grams  
 Material of bolt: Mild Steel  
 Thread of bolt: 1/2" BSW  
 Size of nut: 20.5 mm Hex Nut (Across Flat)  
 Hex Nut (Across Flat)  
 Surface Finish: Cold Zinc Plated  
 Application: Used to connect two Scaffold tubes at 90°



## Girder Clamp

Applicable on tube size 48 mm Dia  
 Material of bolt : Mild Steel  
 Thread of bolt : 1/2" BSW  
 Surface Finish: Cold Zinc Plated  
 Application: Used to connect two Scaffold tubes on beam



## Scaffold Tube

Tube size: 48.30 mm Diameter, 6 meter in length and 3.25mm thickness  
 Component Weight : 21.4Kg for 6 meter length  
 Surface Finish: Self Finished (Black)/Hot Dip Galvanized  
 Application: Is used to erect the scaffolding structure and for fabricating Cuplock system scaffolding / Kwikstage system scaffolding



## Coupler T Bolt


This is the component to repair the couplers



# 2 SCAFFOLD BEAMS

## ALUMINIUM LATTICE BEAM


450mm deep Aluminium Beams are lightweight, high performance, high quality and can be used in all scaffold designs. Sizes 450mm deep beams in 3.1m, 4.1m, 5.1m, 6.1m and 8.1m lengths



ALUMINIUM-LATTICE-BEAM

## LADDER BEAM

Designed to provide a clear span between scaffolds, Steel ladder beams are 305mm deep and 305mm from centre to centre rung, manufactured to any length on request. All Ladder Beams conforms to BS1139

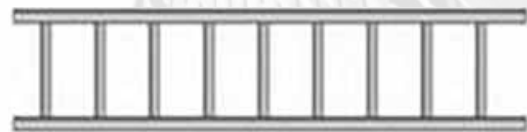

STEEL LADDER BEAM

## UNIT BEAM

Steel unit beam in 8'(2.44m) & 12'(3.66m) lengths gives clear spans where access is required. These beams can be connected using the inbuilt spigot and additional high tensile nuts and bolts. All Unit Beams conforms to BS1139.



STEEL UNIT-BEAM

### 3 CUPLOCK SYSTEMS

#### Transoms

LENGTH	MASS
2.44m	22.4kg
1.83m	13.7kg
1.27m	9.7kg
1.05m	7.9kg
0.61m	5.0kg



#### Plane Base Plate


SIZE	DIMENSIONS
3/4" x 100mm	150mm x 150mm x 6mm



#### Base/Universal Jack

SIZE	CROSECTION
760mm	Hollow

DIMENSIONS	
150mm	150mm x 6mm



#### Decking Beams


SIZE
centre to centre of standard
2.5m
1.8m
1.2m



#### Forkhead

TUBE SIZE	THICKNESS
120mm	3.25mm

H-DIMENSIONS	
100mm	150mm x 100mm x 100mm



#### Infill Beams

SIZE
1.2m
0.9m



#### Cantilever Frame

HEIGHT - H	THICKNESS
1.5m	3.25mm
1.0m	3.25mm



#### Drophead

WEIGHT
5.4 KG



#### Beam Bracket

HEIGHT	THICKNESS
1.5m	3.25mm
1.0m	3.25mm



#### Socket Adaptor

SIZE	THICKNESS	DIMENSIONS
150mm	4mm	150mm x 150mm x 6mm




#### Hop-up Bracket

STANDARD SIZE




#### Standard

SIZE	THICKNESS	
	Light duty	Heavy duty
3.0m	3.25mm	4.0mm
2.5m	3.25mm	4.0mm
2.0m	3.25mm	4.0mm
1.5m	3.25mm	4.0mm
1.0m	3.25mm	4.0mm



#### Ledgers

SIZE	THICKNESS	
	(CENTER TO CENTER OF STANDARD)	
2.4mm	3.25mm	4.0mm
1.8mm	3.25mm	4.0mm
1.2mm	3.25mm	4.0mm
0.7mm	3.25mm	4.0mm



### 4 LAYER-RING LOCK SYSTEMS




### 5 LIGHT WEIGHT H-FRAMES

#### LIGHT DUTY FRAMES

- \* The system has built spigot and are light weight which allows faster assembly and dismissing
- \* No skilled labour required
- \* The frame has tubular brace for better rigidity

Different Light Duty Frames Available are:\

- Italian frame
- Single ladder frame
- Double ladder frame
- Beatty frame

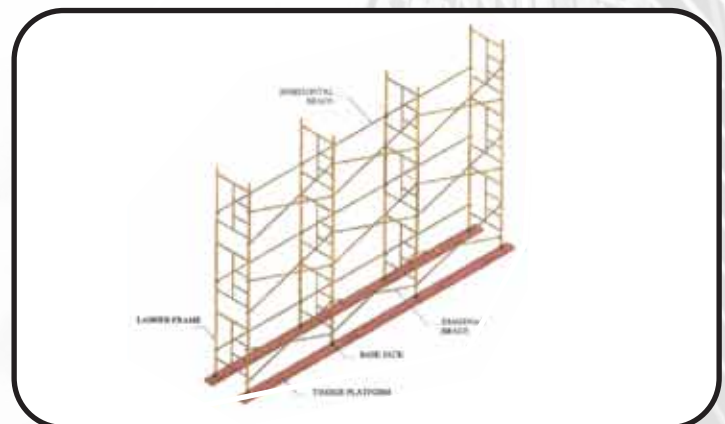

## 6 ALUMINUM & STEEL MOBILE TOWERS



For working at height in a safe, stable and comfortable manner, TIGER aluminium Mobile Towers single width and double width are available for short and long term rental & contract ( supply , erection & Dismantling) We offer aluminum mobile towers from 1m to 15 m working heights. TIGER Aluminium scaffolding system provides a strong & safe tower that meets all applicable occupational health and safety standards. Aluminum Mobile Tower are ideal for builders, painters, contractors, interior companies, Advertising companies, maintenance companies, plumbers, electricians etc.

Note : Follow the instruction Manual to erect the tower .



## 7 ACCESSORIES

### FORM WORK ACCESSORIES




#### Universal Clamp

Applicable on tube size:  
48mm Dia  
Material of bolt: Mild Steel  
Thread of bolt: 1/2" BSW  
Size of nut: 20.5 mm  
Hex Nut (Across Flat)  
Surface Finish: Cold Zinc Plated




#### Counter Plate with Wing Nut

Applicable on tie rod size: 17mm  
Component Weight : 450 grams  
Surface Finish: Self finished/Cold Electro zinc plated  
Application: on tie rod



#### Timber Walling Clamp

Material : Mild Steel  
Thread of bolt: 1/2" BSW  
Size of nut: 20.5 mm  
Hex Nut (Across Flat)  
Surface Finish: Cold Zinc Plated



#### Rapid Clamp

Material : Casted iron  
used in 8 mm and 10 m steel bars



#### H 20 Beams Wooden

Height: 200 mm  
Used with Cup lock system and all other major system



#### Tie Rod Connector

Used for connect tie rod  
Size : 50 mm and 100 mm



### Tie Rod 16 to 32mm

Component Weight: 8.9 Kg for 6 meter length  
Surface Finish : Self Finished Size: 15/17mm dia  
Load: 90KN breaking load  
Available size : 0.5 Mtr. To Mtr.



### Wing Nut (for Tie Rod) 16 to 32mm)

Applicable on tie rod size: 17mm Dia  
Component Weight : 280 grams  
Surface Finish: Self finished/Cold Electro zinc plated  
Application: on tie rod



### PVC TYPE STEEL CONE /D CONE

Made from Low Carbon Steel with PVC Cove.  
The Safe Working Load is 90 KN. PVC Type Steel Cone manufacturer Threading is suitable for 15/17mm tie rod.  
The available length of 100mm.



### STEEL CONE

Made from Low Carbon Steel.  
The Safe Working Load is 90 KN. Steel Cone Exporter Threading is suitable for 15/17mm tie rod.  
The available lengths is 75mm and 100mm.




### Water Stopper

Casted, with PVC cap suitable for Tie rod 16mm



### Washer Plate

Applicable on tie rod size: 17mm Dia  
Thickness available: 5, 6, 8, 10 mm thick  
Surface Finish: Self finished/  
Cold Electro zinc plated  
Application: on tie rod



### Shuttering Clamp



### PVC Cone



### Tie Rod Sleeve Pipe



LVL BOARDS (Tiger)



SCAFFOLD BOARD  
(wooden)



SCAFFOLD ENDBAND



STEEL BOARD  
WITH HOOK



STEEL BOARD  
WITHOUT HOOK



FIRE RETARDANT  
SCAFFOLD BOARD

We are importing from, Austria, European, Union, China the Scaffold. Boards that strictly comply with the British Standard BS2482 : 2009 and OSHA standard

#### AVAILABLE SIZES:

38mm\*225mm\*3.9m  
38mm\*225mm\*3.0m  
38mm\*225mm\*2.5m  
38mm\*225mm\*2m  
38mm\*225mm\*1.5m  
38mm\*225mm\*1m

# 10 SCAFFOLD TOOLS & ANCILLARY



**Hammer**



**Gin Wheel 8" & 10"**



**Rope for Gin Wheel**



**Scaffolder's Spanner with lanyard Tiger (UK)**



**Scaffolding Ring Bolt**



**Ratchet Spanner**



**Pvc Coupler Cap**



**Measuring Tape & Hammer Pouch 02**



**Tool Wrist Lanyard**



**Scaffold Tool Belt DEK**



**Scaffolders Belt HD Tiger**



**Tool Bag - Tiger**



**Full Body Harness**



**Scaffold Spanner**



**Ladder Tag & Micro Tag**



**Inspection Tag -Safety Tag**



**Safety Rebar Cap - Mushroom & Drum type**



**Tube & Fittings End Cap**



**Tredda Plate - Base Plate Pad**



**Tube protection Sleeves**




**Measuring Tape**



**Scaffolding Spirit Level with Magnate (Tiger) - 10"**



**Tool Lifting bag 30 & 50 kg**



**Scaffolding Spring Gate Auto**



# 11 SCAFFOLD CASTER WHEELS



Caster Wheel Heavy Duty Dual Type - **Rexello**



Caster Wheel Heavy Duty Pipe Type



Caster Wheel Heavy Duty Rod Type



Aluminum Tower Wheel Adjustable



Castor Wheel for Aluminum Tower



Revvo scaffolding wheels UK

# 12 LADDERS & ACCESSORIES / LOWER HEIGHT ACCESS

Aluminum-Folding-Ladder-



Aluminum-Podium-Scaffolding



Aluminum Platform -Ladder



Timber Pole Ladder (Haydock-UK Origin)



Rolling-Warehouse-Aluminum-Ladder



Fiber Glass Ladder



Steel ladder



Two-Way-Aluminum-Ladder



Ladder Clamp



Ladder Clamp (Size: 48.3mm)  
Safely and securely clamps a ladder to a scaffold tube.  
Used in Pares ensure that a ladder cannot slip or lean.

# 13 SCAFFOLD MANUFACTURERS ACCESSORIES




## Round washer for Round spigot

Size : 38 mm dia pipe  
Finish : GI and MS  
Thickness : 2.5mm



## Round washer for Square Spigot

Size : 31 mm x 31 mm SHS  
Finish : GI and MS  
Thickness : 2.5 mm



## Prop Sleeve

Application: For Light/Heavy duty Props system component  
Weight: 1 kg to 2 kg  
Pipe thicknes : 3mm/4mm



## Pressed Sheet Metal Bottom Cup

Applicable on tube size : 48 mm Dia  
Component Weight : 200 grms  
Surface Finish: Self finished  
Application: Cuplock Scaffold system component welded at the vertical pipe to hoist horizontal (pipe) Ledger



## Drop Forged Jack Nut

Applicable on tube size : 48 mm Dia  
Component Weight : 440 grms  
Surface Finish: Self finished/Cold Zinc Plated  
Application: Base jack nut used to level the jack



## Snap Lock

Size : 12mm dia / 18 mm dia  
Used for Light Weight / Heavy duty frames



## Malleable Cast Iron Top Cup

Applicable on tube size: 48mm Dia  
Component Weight : 425 grams  
Surface Finish: Self Finished  
Application: Cuploc Scaffold system component used to tighten the horizontal Ledger



## Drop Forged Ledger Blade End

Applicable on tube size: 48mm Dia  
Component Weight : 210-215 grams  
Surface Finish: Self Finished  
Application: welded at the end of horizontal (pipe) Ledger



## D Pin


Size : 12mm dia  
Used for Light Weight Heavy duty frames



## Prop Nut



## Drop head wedge plate



## Locking Pins

# 14 PROPS & PUSH PULL PROPS



## Adjustable Steel Props



## Steel scaffolding prop u head



## Prop U Head



## PUSH PULL PROPS

# 15 STAIRCASE SYSTEM





**Scaffold Sales:**



Building Materials Trdg. Co.L.L.C.

**AL NASEEHA BLDG.MAT. TRD. CO. L.L.C.**

P.B. No.: 120447, Dubai - UAE,  
Tel.: +971-4-5892555 , Fax: +971-4-5892555  
Mob: +971 50 6536760  
E-mail : sales@alnaseeha.ae , alnaseeha@eim.ae  
Web: www.alnaseeha.com

**For Rental & Contract:**



**DECAGON SCAFFOLDING & ENGINEERING CO. L.L.C.**

P.B. No.: 232583, Dubai - UAE,  
Tel.: +971-4-5892555 , Fax: +971-4-5892555  
Mob: +971 55 494 4321  
E-mail : contract@decagonscaffolding.ae  
Web: www.decagonscaffolding.ae  
www.decagonme.com